



Hundred Duo Twelve
HANDCRAFTED BY RIVERA RESEARCH & DEVELOPMENT
SUN VALLEY, CA, USA



CONNECTING THE HUNDRED DUO TWELVE WITH OTHER GEAR

The following illustrations will help you to properly connect your Hundred Duo Twelve to other amps, extension speaker cabinets, and recording and P.A. gear. Make sure the amp and all other gear are turned off whenever you make or change any connections.

Driving an extension speaker cabinet

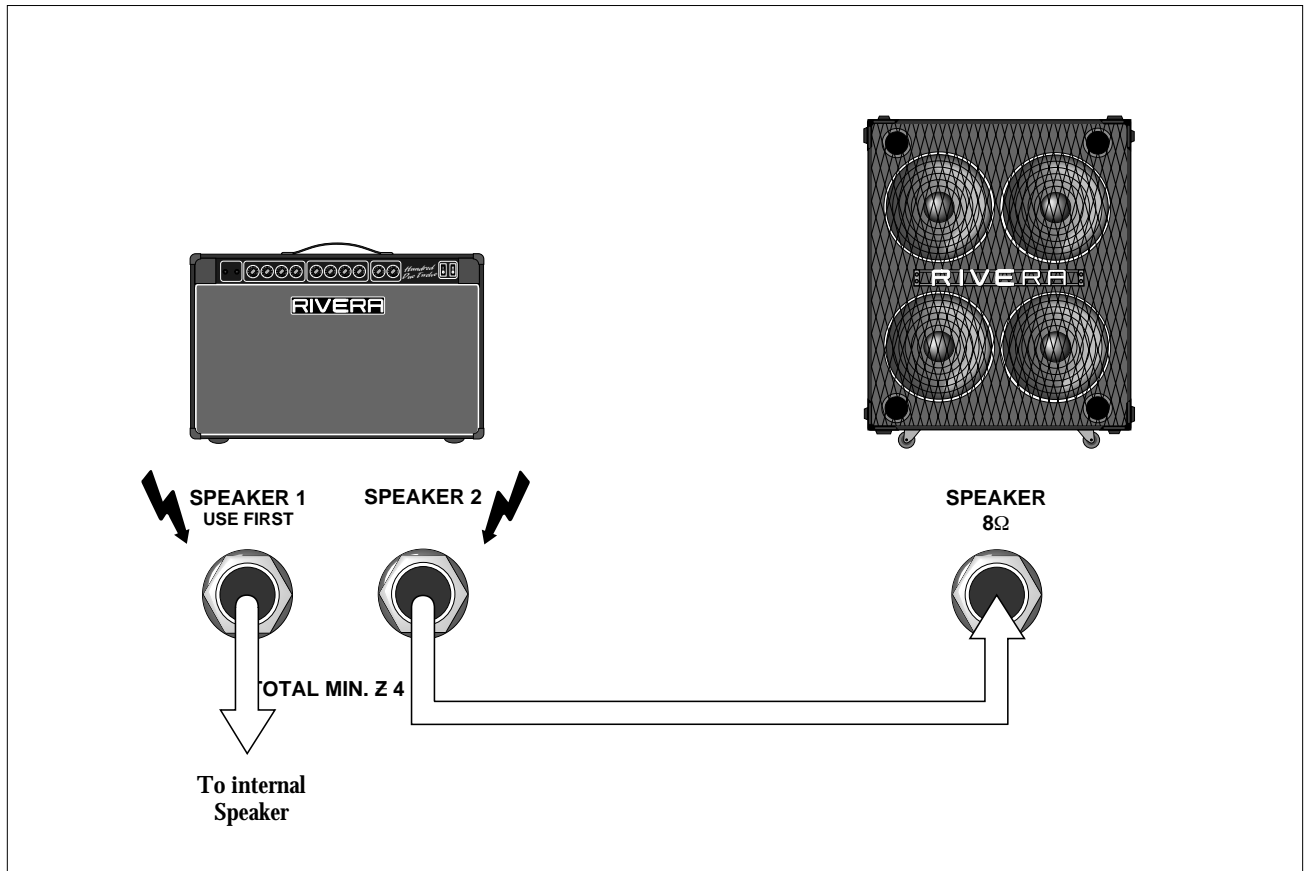

Using a heavy-gauge speaker cord, connect the output jack labeled Speaker 2 to the speaker input on an extension cabinet with a 4- or 8-ohm impedance and power-handling capacity of at least 100 watts. A 16-ohm extension cabinet can also be used, but it will reduce the amp's output. Don't use a 2-ohm extension speaker. Note: Make sure that the Speaker 1 output is connected to the Hundred Duo Twelve's internal speaker.